
Sharing Zund Cut Center / Summa Cut Folder


1. Navigate to the folder below on the Onyx Server you want to share the folder of

   > **C:\ONYXThrive21\cutter**


2. Right click the folder you want to share

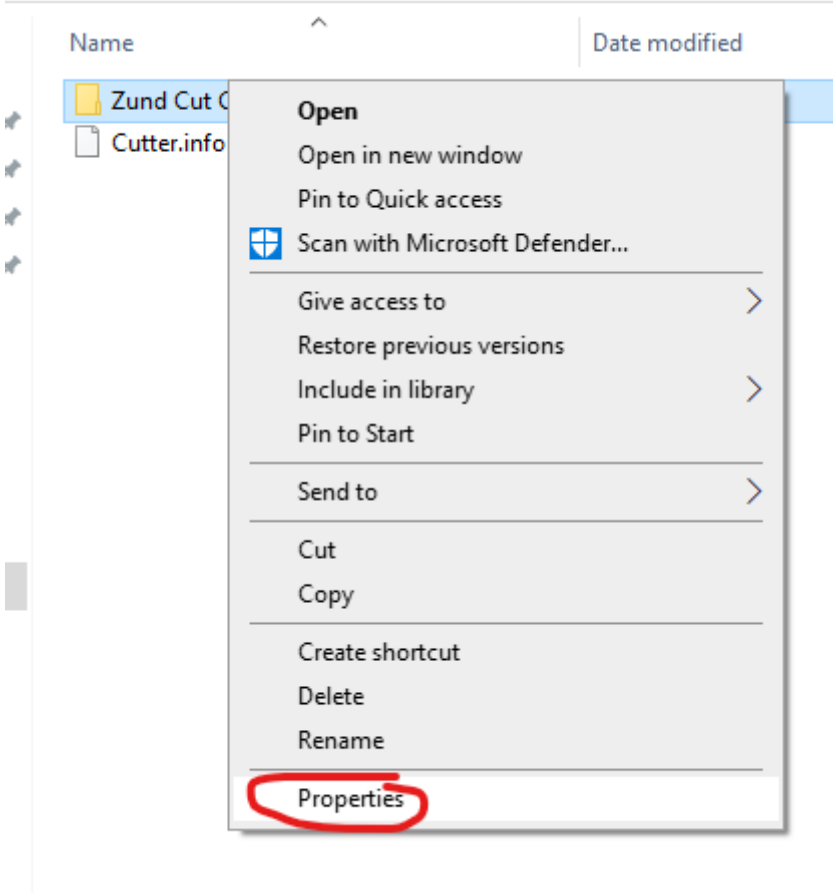


3. Select Properties
4. Go to the sharing tab

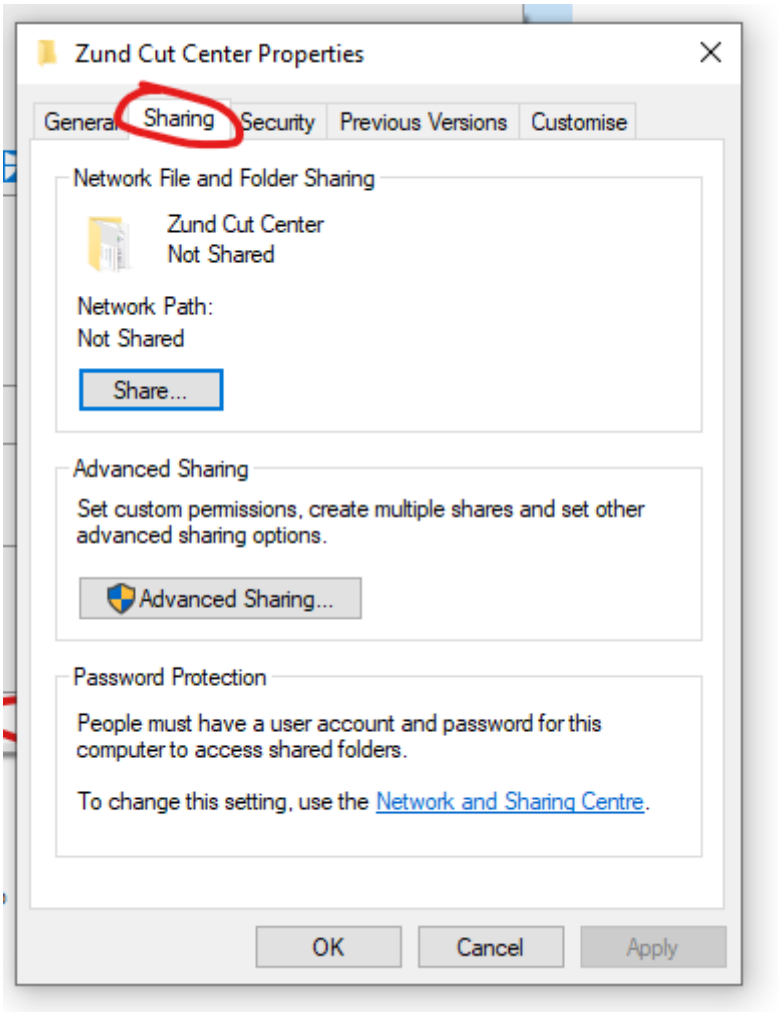


5. Click on **Advanced Sharing**

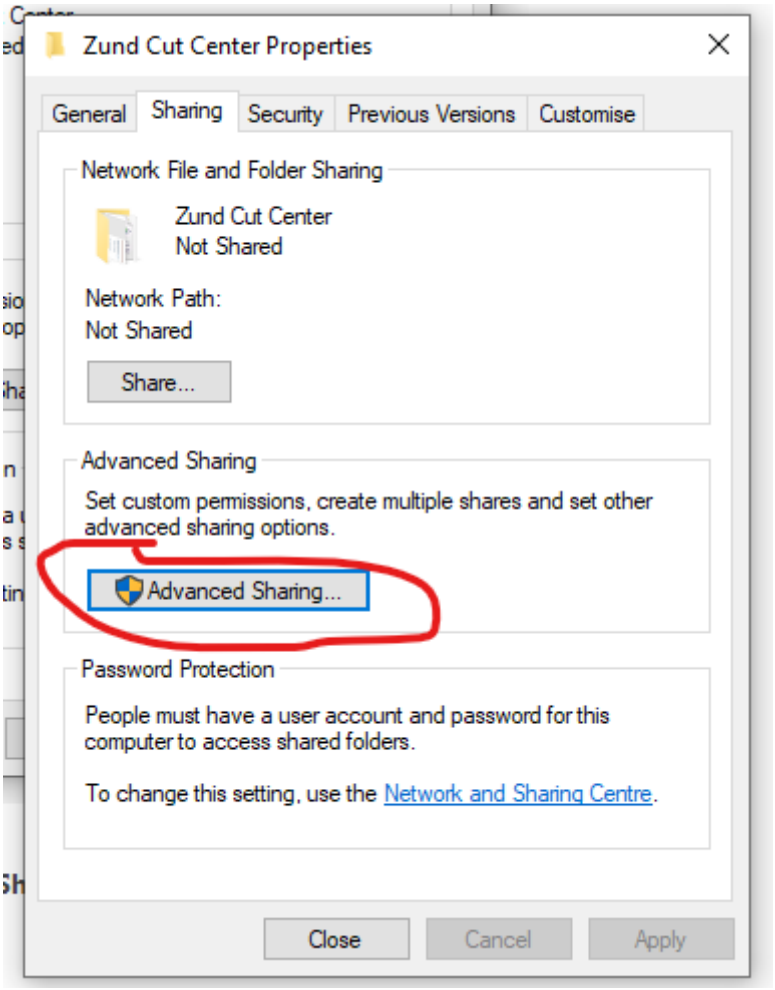


6. Check the box for share this folder then add a new share with the Computer Name followed by a dash and a folder description e.g. Print002-ZundCutCenter (How to get the computer name)

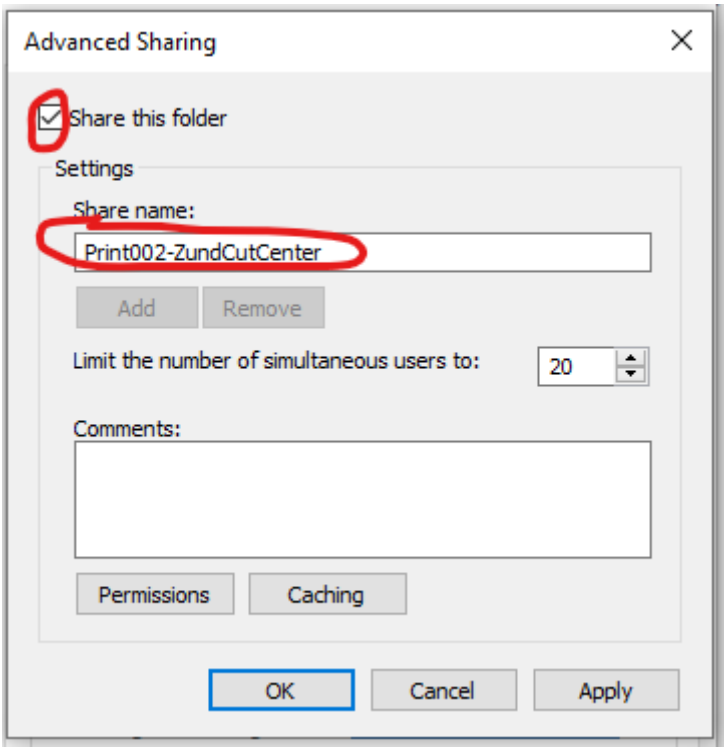


7. Click permissions

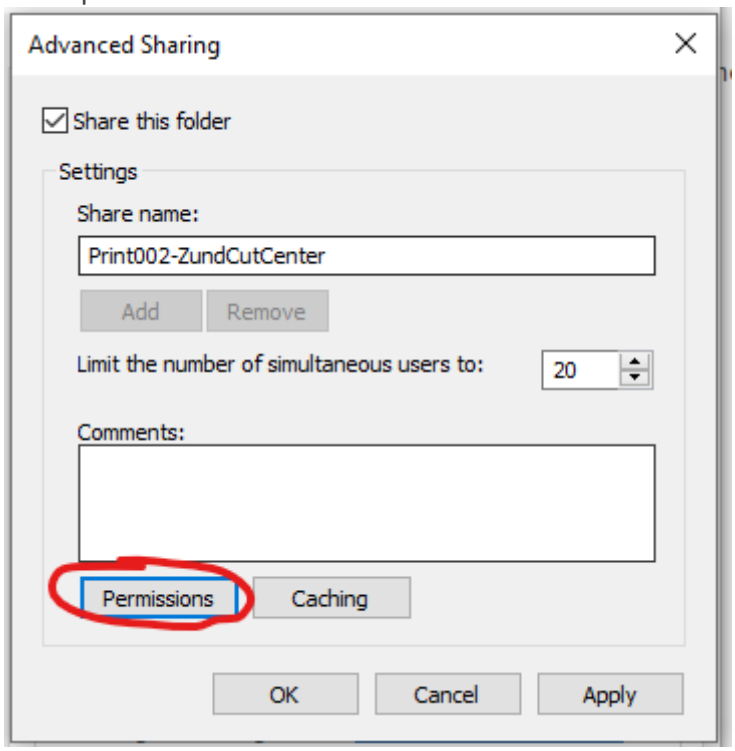


8. Select Everyone and make sure all permissions are selected

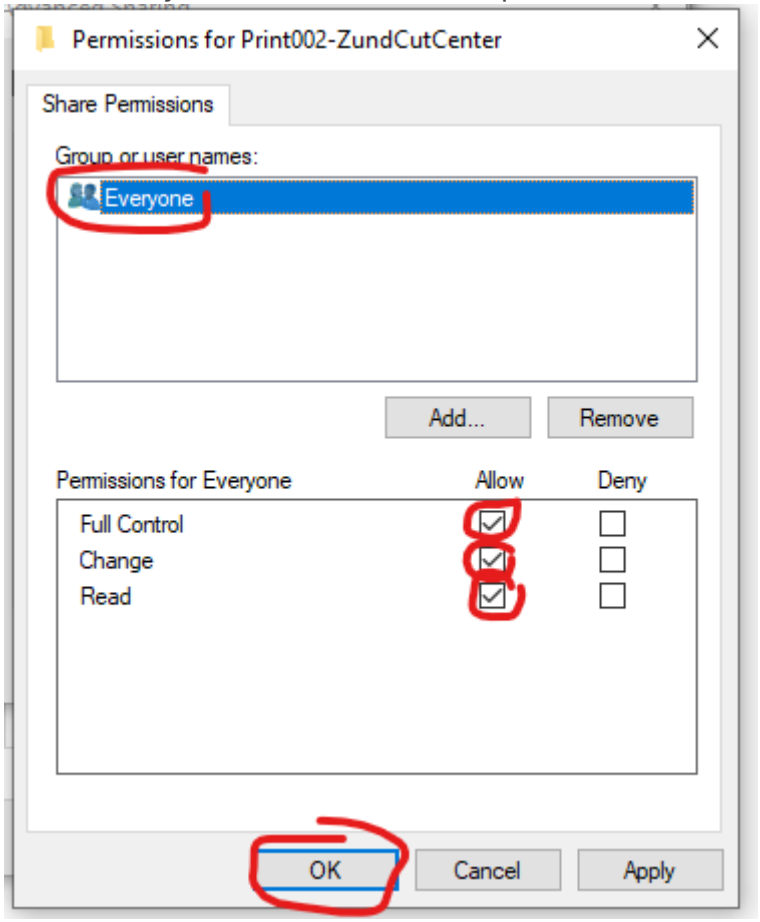


9. Click "Add"

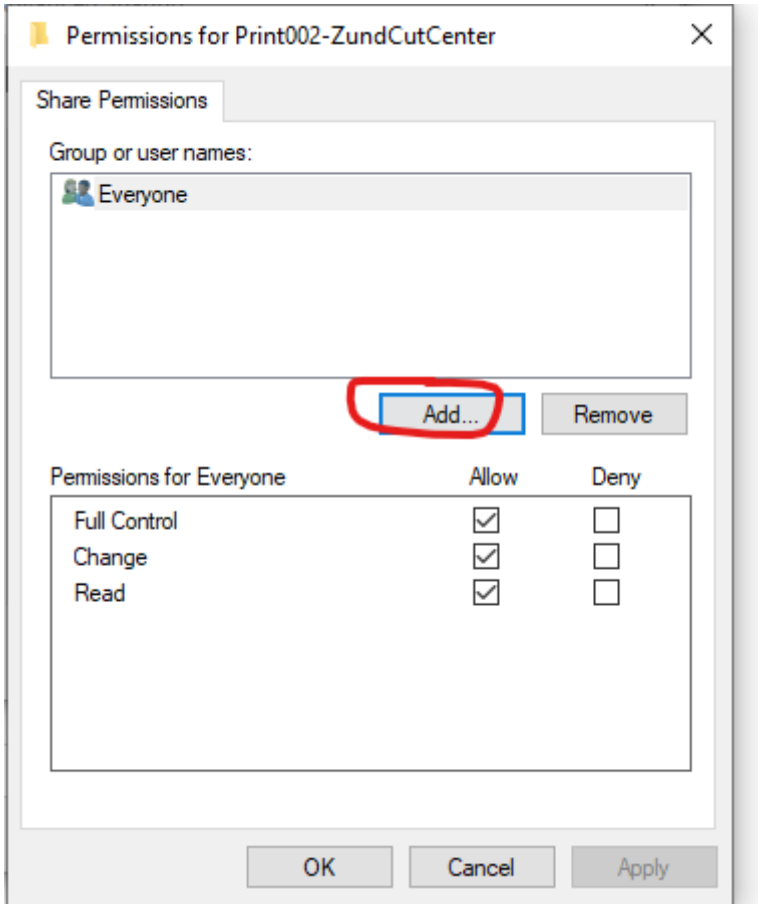


10. Enter "maticmedia" and click okay

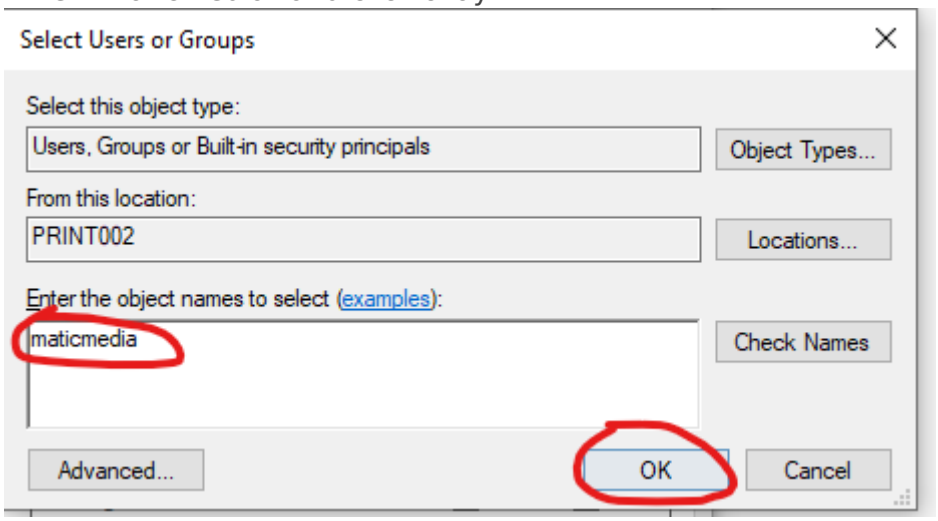

11. Add the permissions for maticmedia

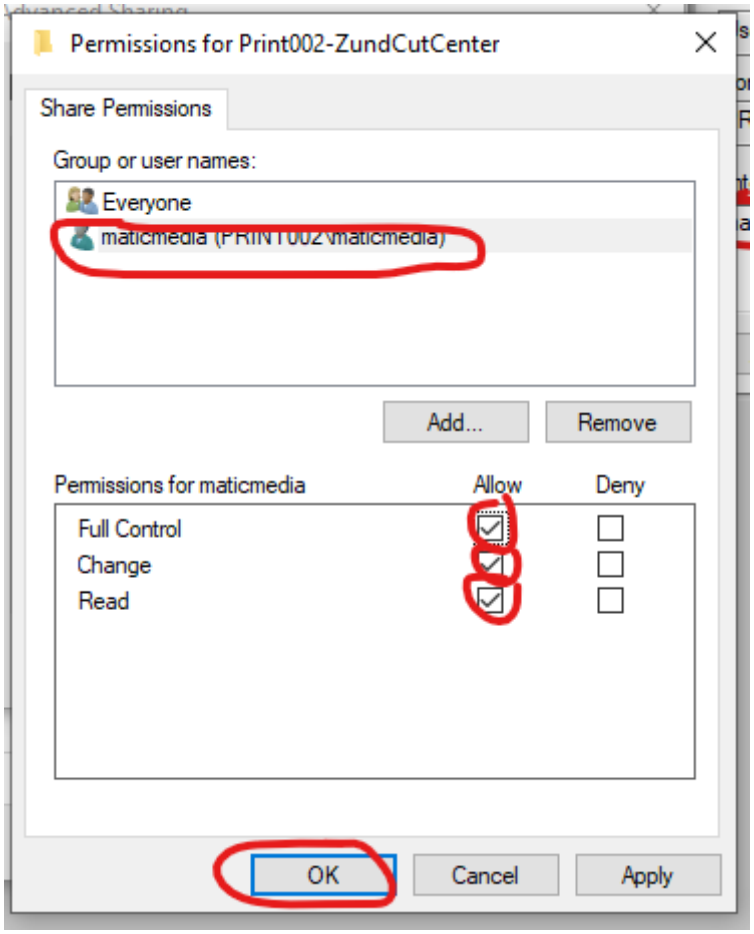


12. This is the share path you need to add to the hot folder on the Zund Cut Server

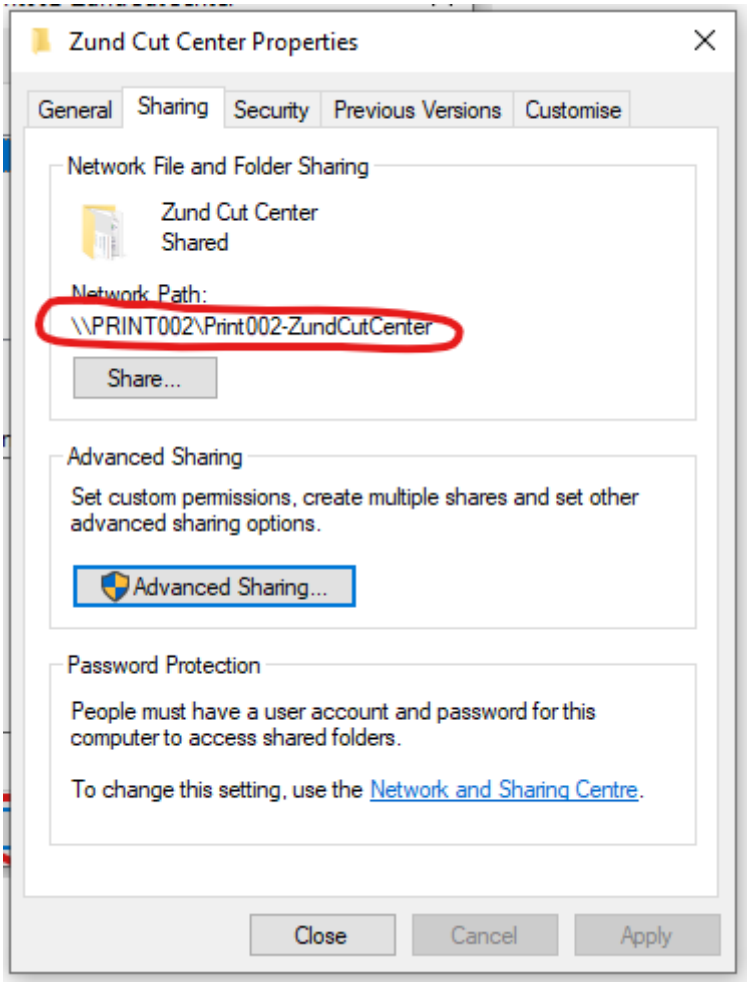


13. Go to the Zund Cut Server Computer
14. Right click the Zund Cut Manager Icon at the bottom right of the screen



15. Select **Cut Manager**

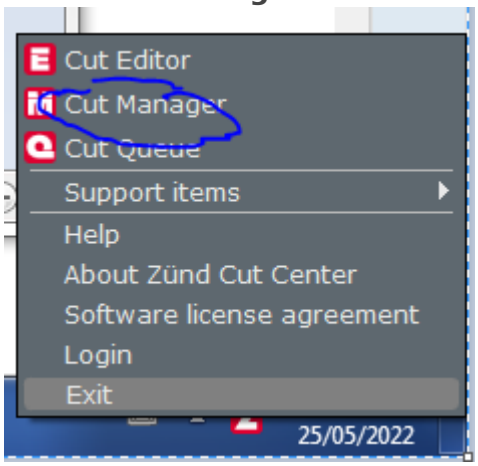


16. In Cut Manager select **Settings Tab** and then **Hotfolders**

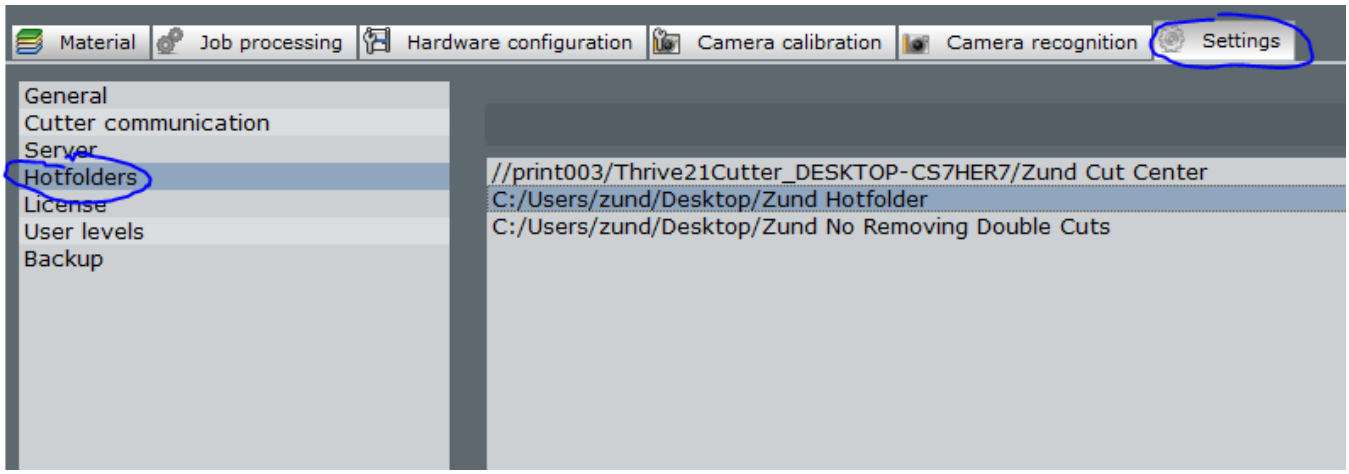


17. Click the plus symbol



18. Navigate to the share folder from step 9, in this case \\Print002\Print002-ZundCutCenter"

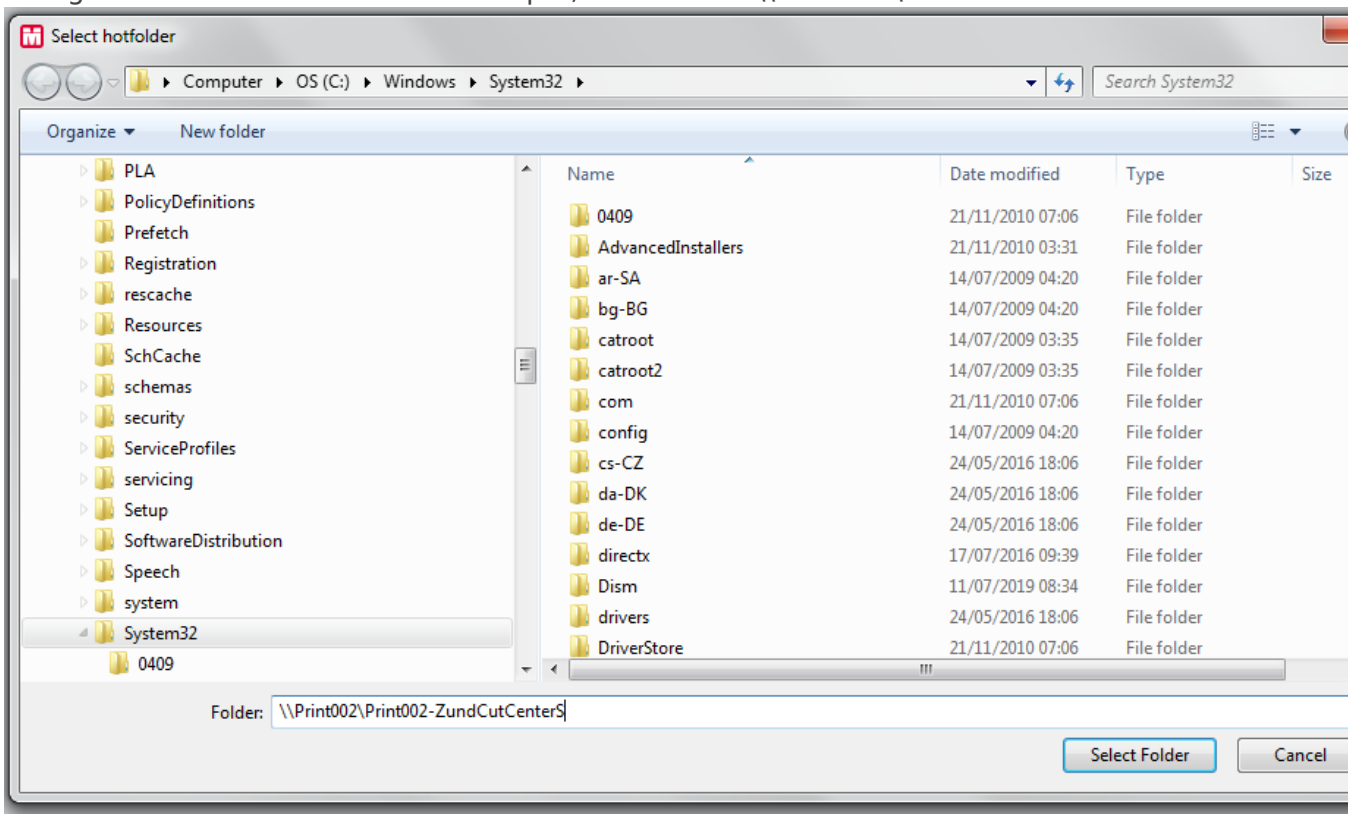


19. You may be prompted with the following, the username is maticmedia and no password. Make sure to selected "Remember my credentials"

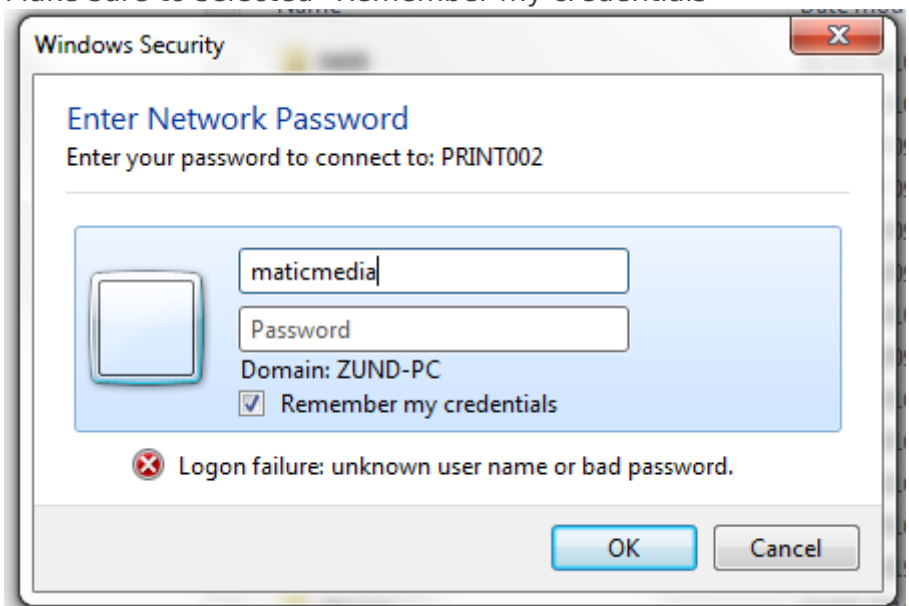


If you see this error

20. If you see this error

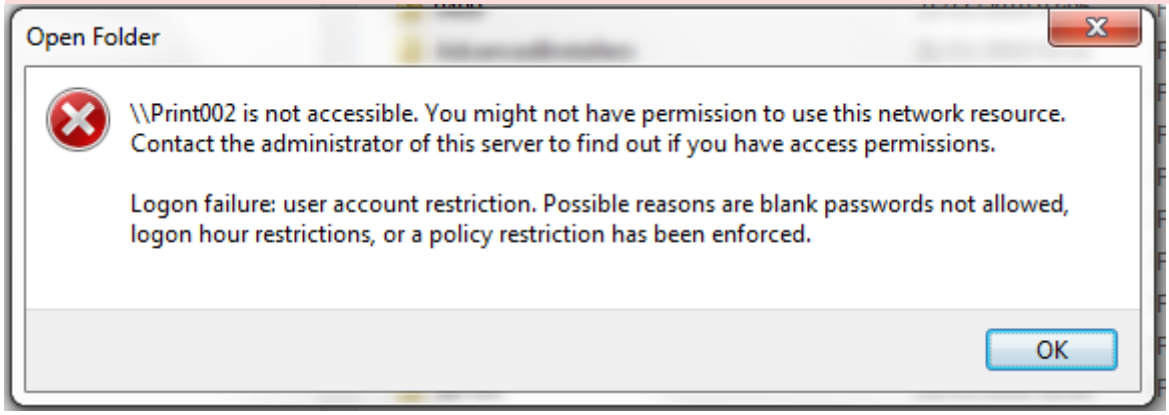

Go to how to fix user login error, no password


21. Click OK

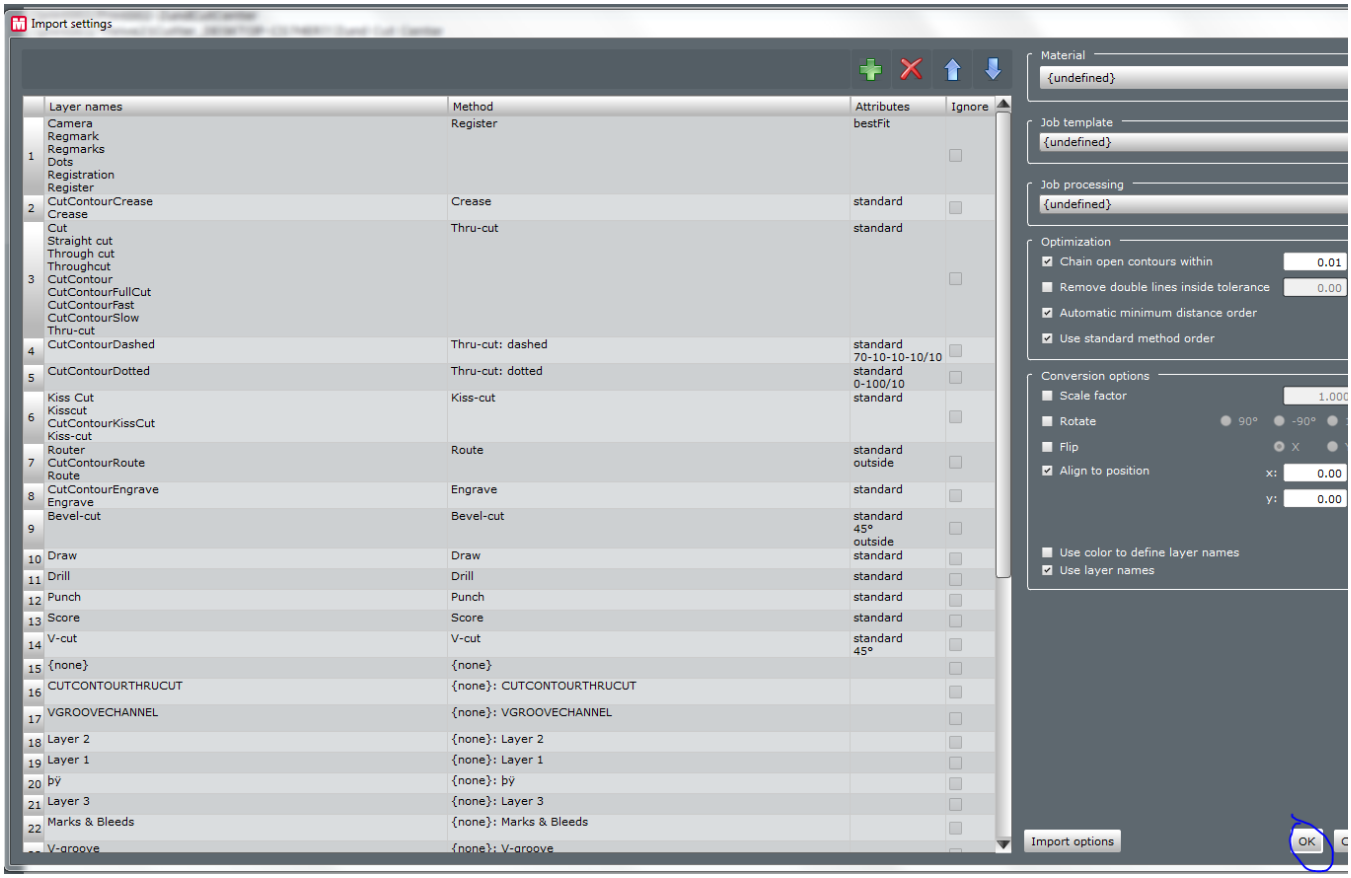



22. Restart Computer


How to fix Permissions Denied Error

When receiving the error below you have to go to the computer you are trying to access and allow security permissions for all users in the network. In the case below this would be **PRINT002.**

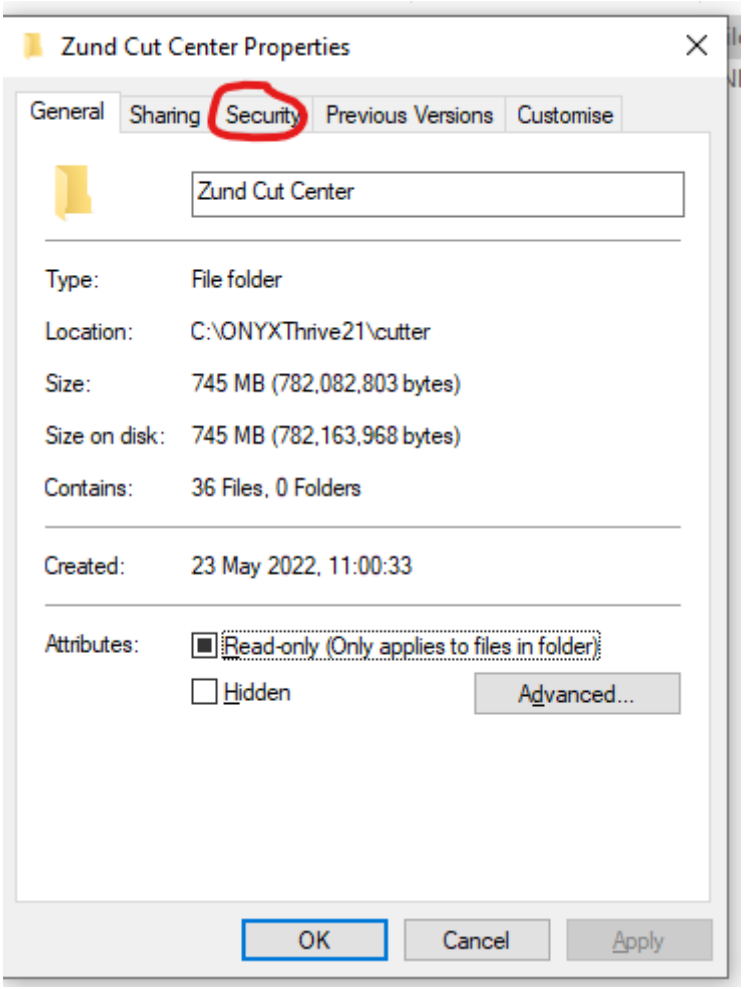
Zund Cut Center Properties
General
Sharing
Security
Previous Versions
Customise
Zund Cut Center
Type: File folder
Location: C:\ONYXThrive21\cutter
Size: 745 MB (782,082,803 bytes)
Size on disk: 745 MB (782,163,968 bytes)
Contains: 36 Files, 0 Folders
Created: 23 May 2022, 11:00:33
Attributes:
Read-only (Only applies to files in folder)
Hidden
Advanced...
OK
Cancel
Apply

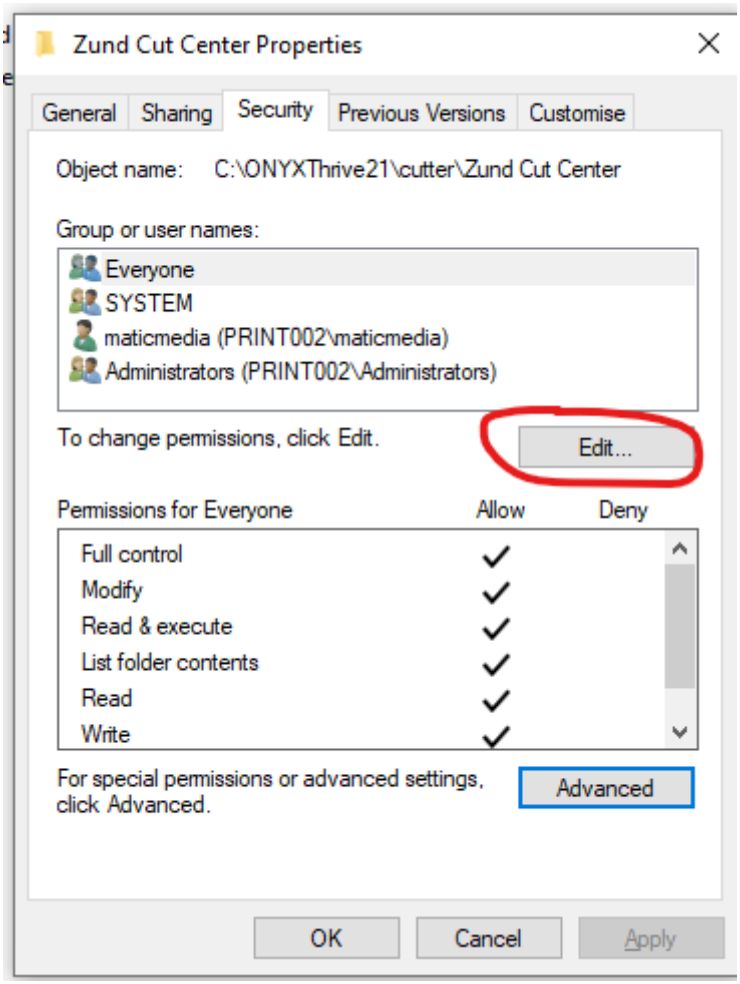

Zund Cut Center Properties
General
Sharing
Security
Previous Versions
Customise
Object name: C:\ONYXThrive21\cutter\Zund Cut Center
Group or user names:
Everyone
SYSTEM
maticmedia (PRINT002\maticmedia)
Administrators (PRINT002\Administrators)
To change permissions, click Edit.
Edit...
Permissions for Everyone
Allow
Deny
Full control
Modify
Read & execute
List folder contents
Read
Write
For special permissions or advanced settings, click Advanced.
Advanced
OK
Cancel
Apply

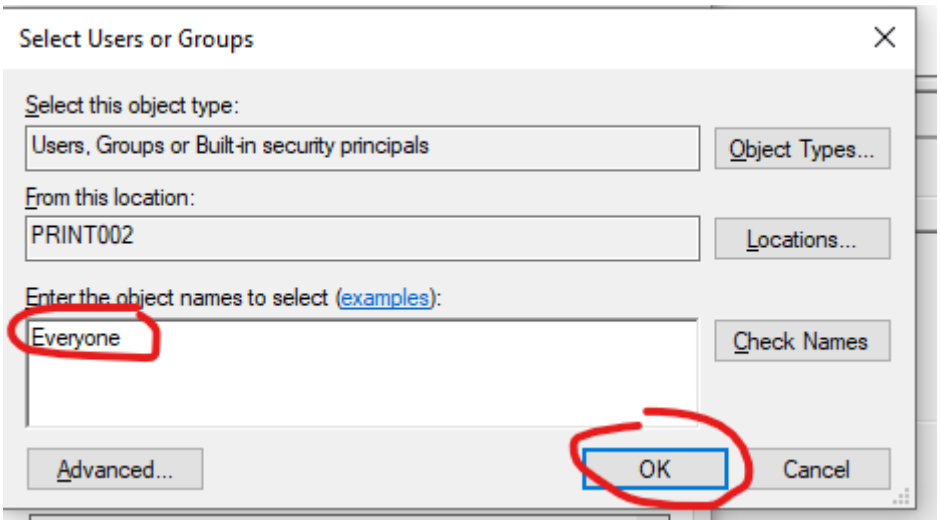
Select Users or Groups
Select this object type:
Users, Groups or Built-in security principals
Object Types...
From this location:
PRINT002
Locations...
Enter the object names to select (examples):
Everyone
Check Names
Advanced...
OK
Cancel

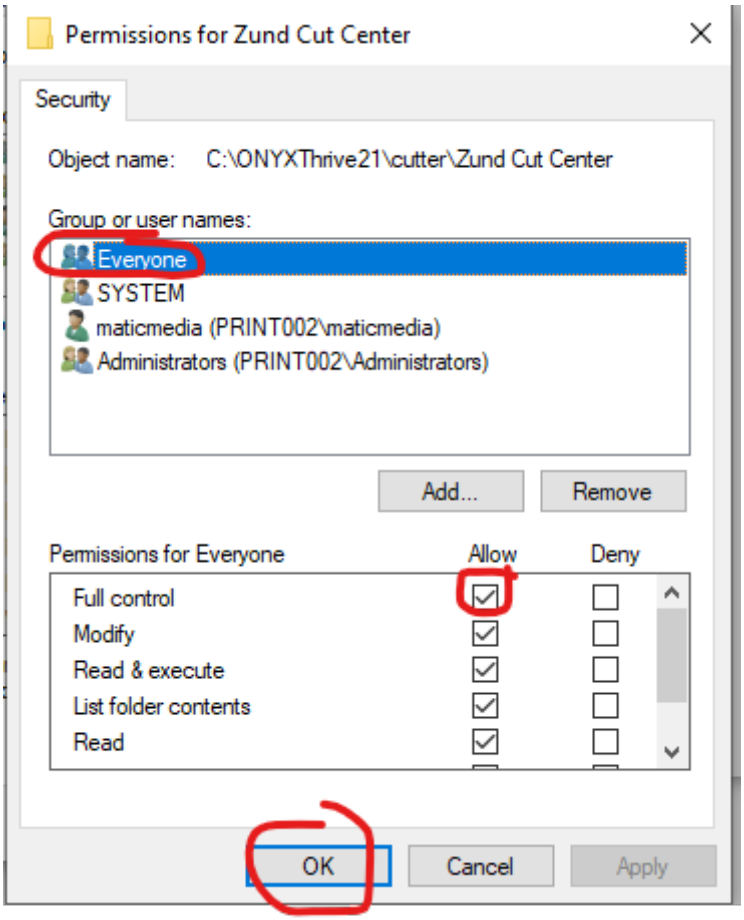

How to fix user login error, no password


When receiving the error below you have to go to the computer you are trying to access and allow network access with no passwords. In the case below this would be **PRINT002.**

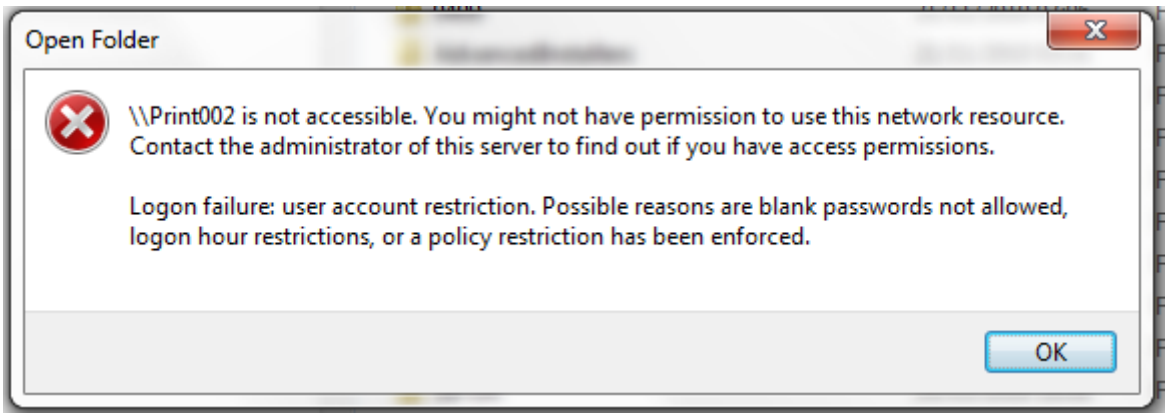


1. Click the network icon at the bottom right of the screen




2. Click Network and internet settings

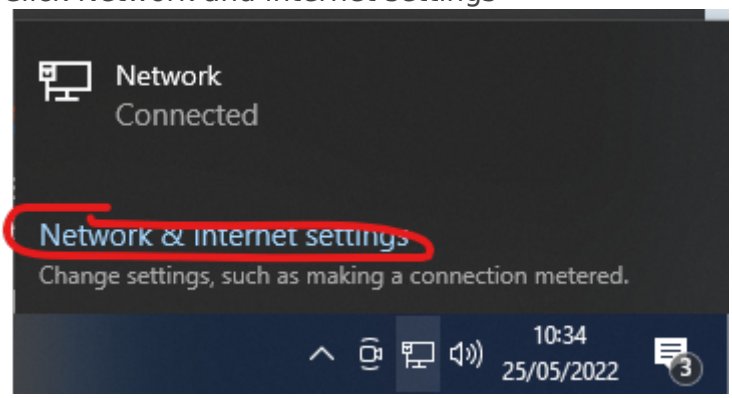


3. Click properties

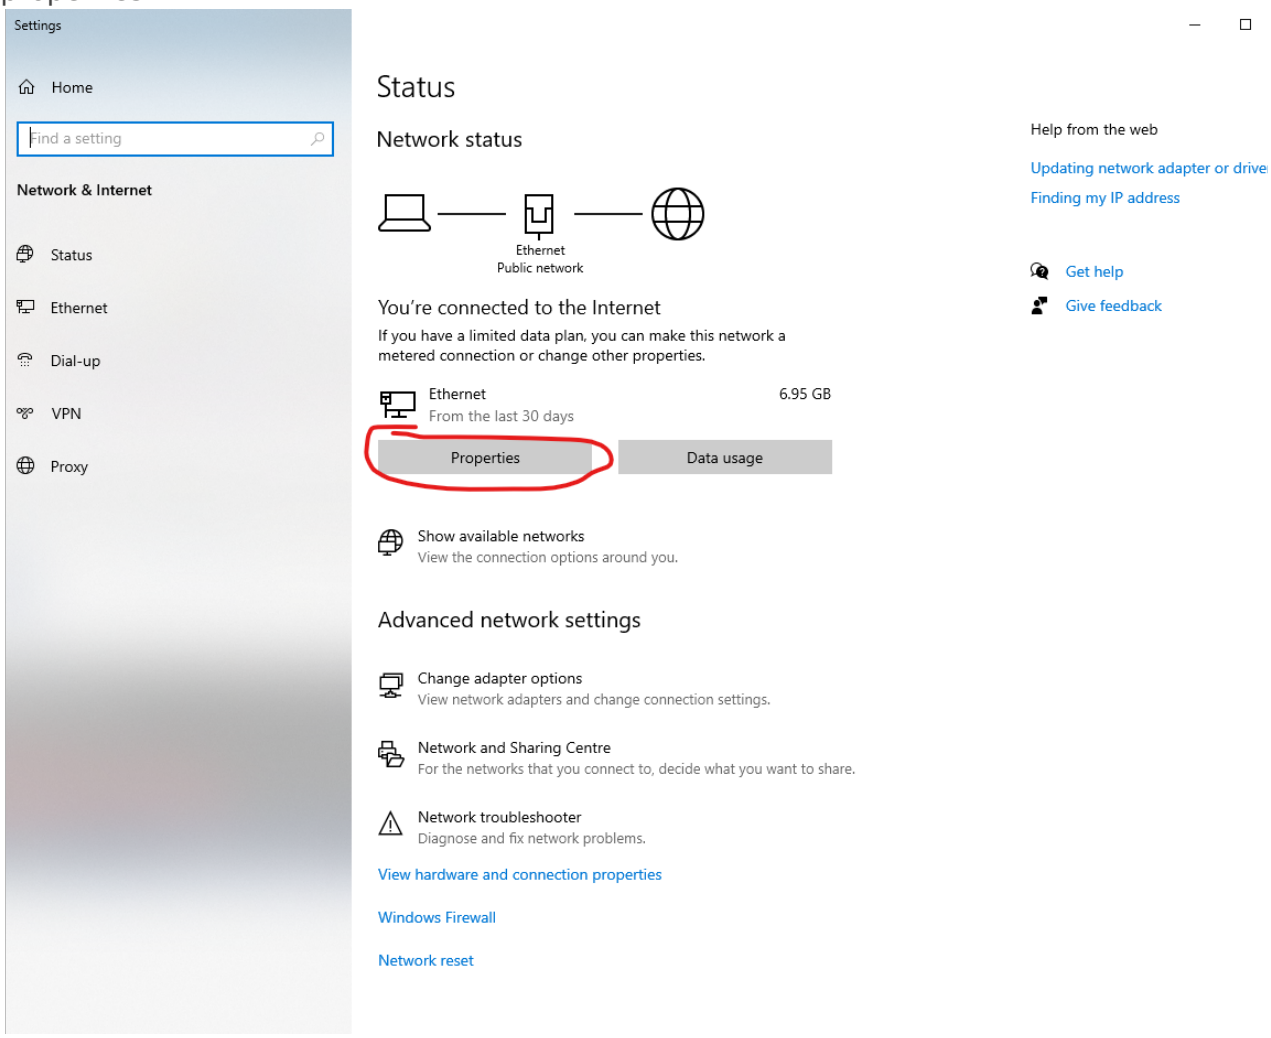


4. Change network to private

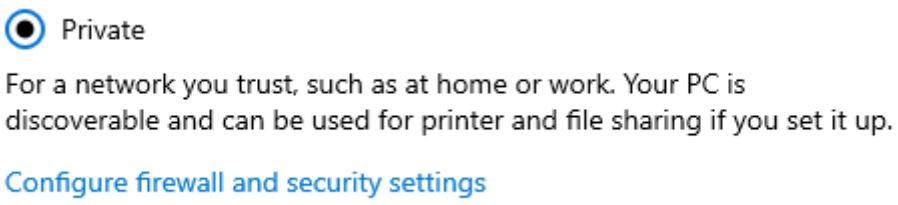


5. Go back to Network and Internet Settings and **Click Network and Sharing Center**

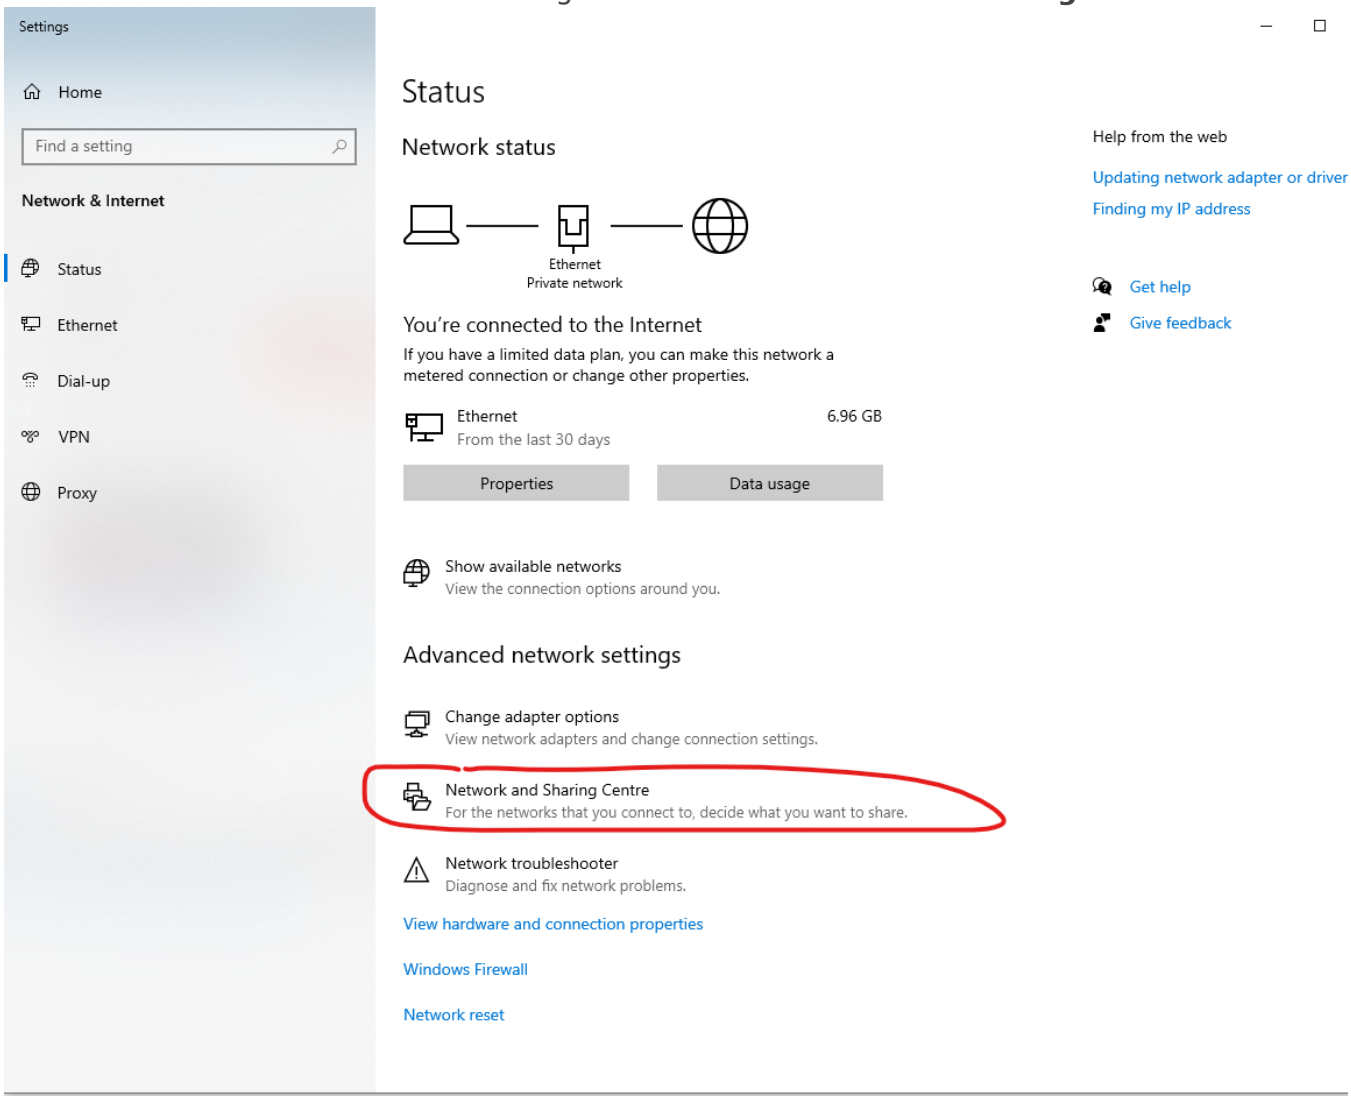


6. Click "**Change advanced sharing settings**"

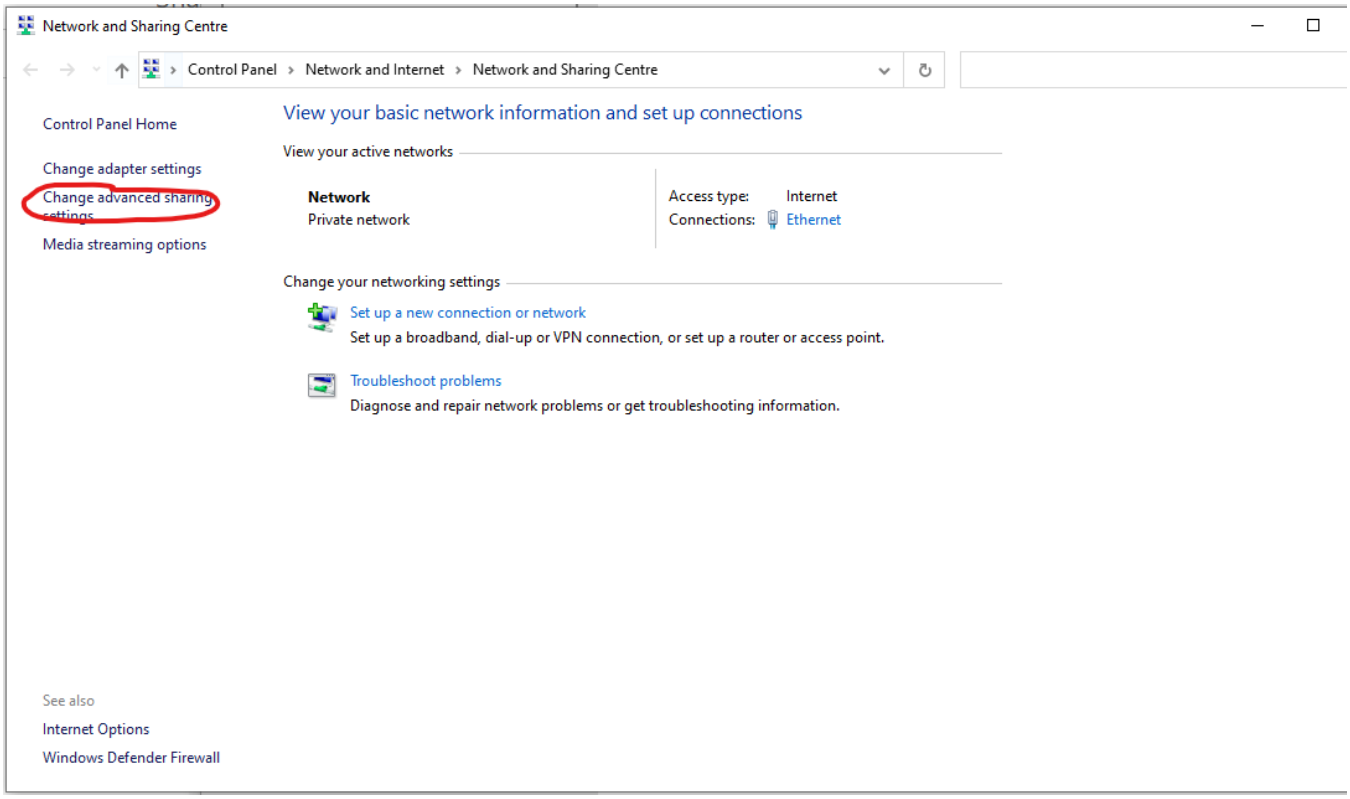

7. Click on **Private (Current Profile)** and make sure **file and printer sharing** is selected

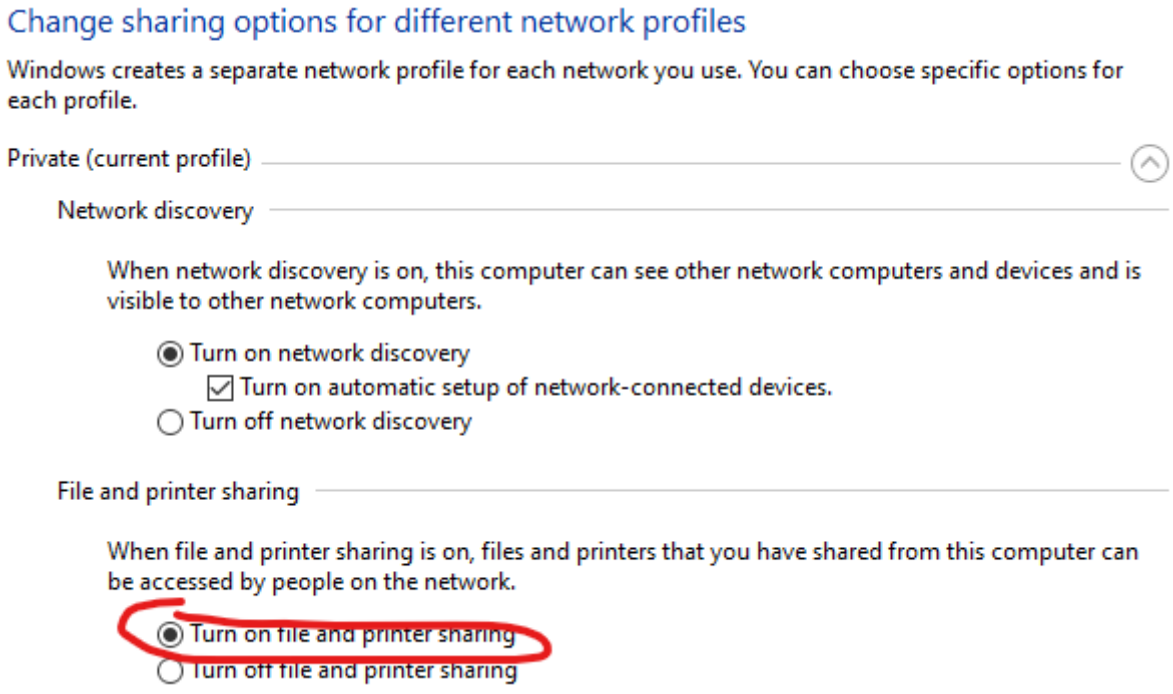

8. Click on **Private Networks** and **Check Turn Off Password-protected sharing**

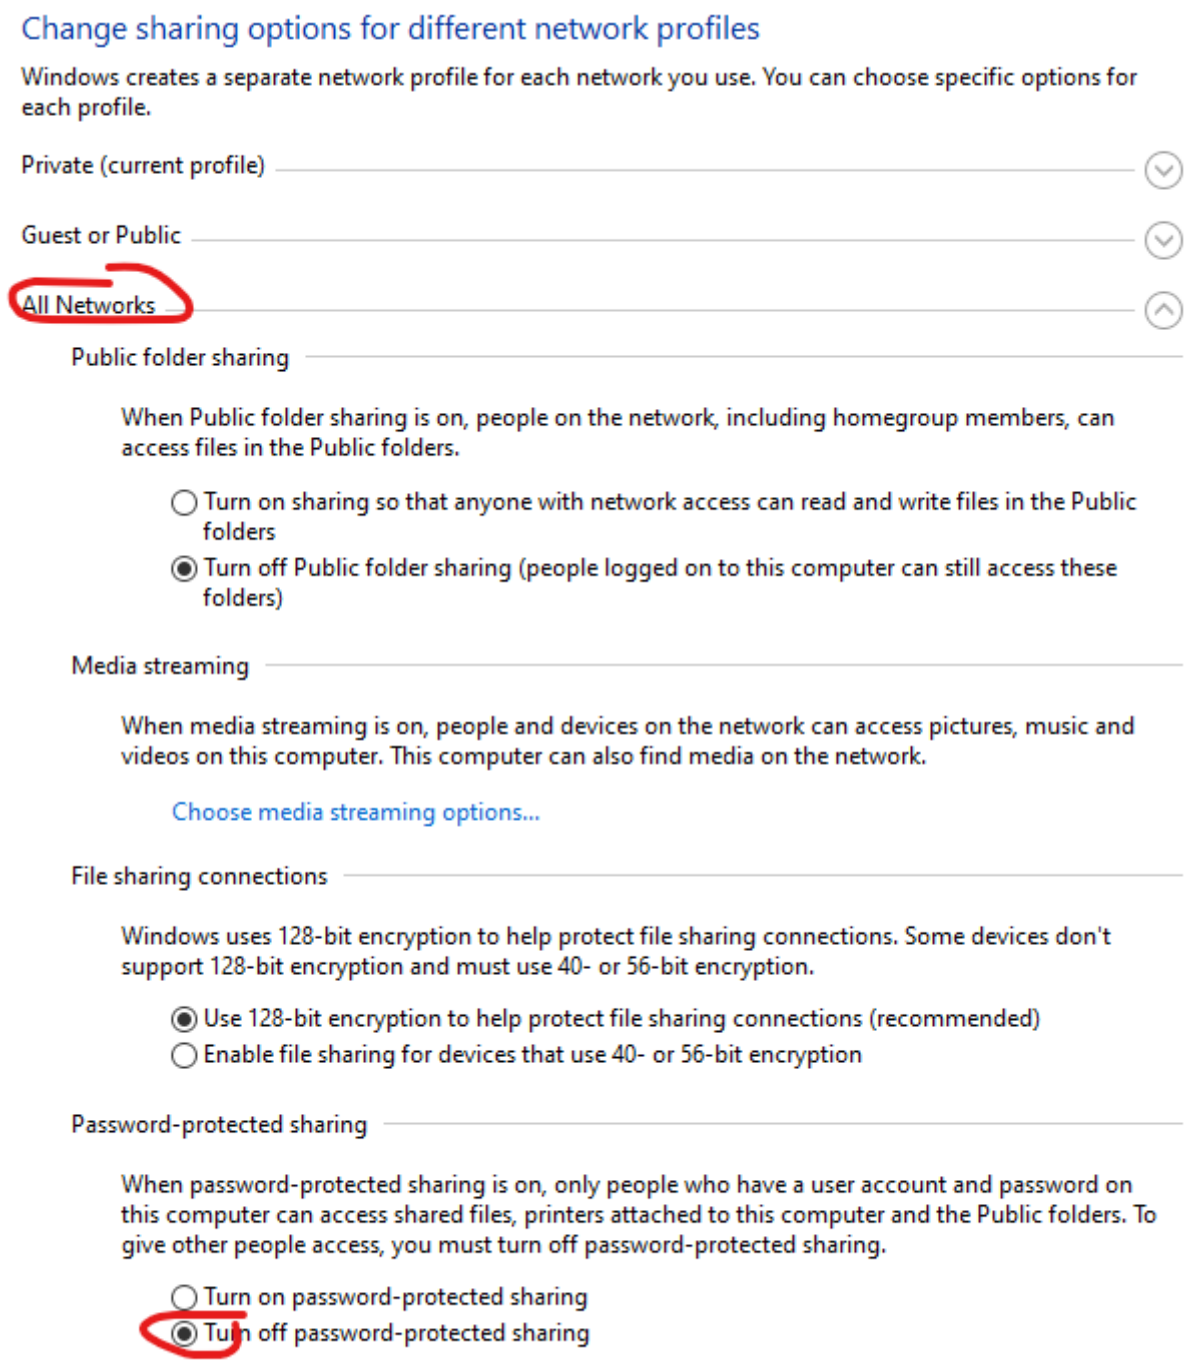

Revision #8
Created 25 May 2022 09:06:38 by Admin
Updated 25 May 2022 10:09:47 by Admin